

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://microsensor.nt-rt.ru/> || moj@nt-rt.ru

Реле давления МРМ5581. Технические характеристики.

MPM5581 Intelligent Pressure Switch



Features

- Pressure measurement for gas and liquid
- Optional for PNP, current output
- Peak value display
- Ranges drift function
- PNP switch point setting, time delay setting for action
- Modbus communication
- OLED display
- Display rotate 180°
- Body rotate 330°
- Change-over of different units

Introduction

MPM5581 is an intelligent pressure switch combining pressure measurement, local display and control together. It uses advanced industrial-grade MCU as core and high quality pressure sensor as sensing element. With well-designation and adjustment, MPM5581 has quick reaction and good electro-magnetic compatibility for pressure control at the premise of accuracy. It can be widely used for industrial site pressure control in pump, hydraulic and pneumatic equipments.

MPM5581 is able to visually process the process pressure and switch contacts status through switch output, analog output and display screen. It has various output signals for different application. MPM5581 switch has functions such as time delay setting, ranges drift setting (scales: 25%FS~100%FS), as well setting: clear zero, base point, peak display. With special designation and construction, it can be installed vertically, horizontally or rack mounting. The body can rotate 330°; display can rotate 180° in order for viewer to face up to the display screen. OLED display is very clear to read.

Specification

Range: (bar)

1, 3.5, 7, 16, 35, 70, 100, 250, 400, 600

Range drift: 25%FS~100%FS

Pressure Type: Gauge, Absolute

Overpressure: 2×FS or 100MPa(min. value is valid)

Accuracy: $\pm 0.5\%$ FS

Hysteresis: $\pm 0.2\%$ FS

Thermal error: $\pm 0.02\%$ FS/°C (Zero/FS)

Power supply: 12V~30VDC

Long Time Stability: $\pm 0.3\%$ FS/year

Outputs:

2 switches+current output: 2×PNP +0mA/4mA~20mADC

Switch current: 1.0A(Max.)

Switch life time: >100 times

Switch reaction: <10ms

Switch time delay: 0.0s~99.9s

Switch action pattern: Hys.Mode/Win.Mode
Switch current:1.0A(Max.)

Switch reaction: <10ms

Switch time delay: 0.0s~99.9s

Switch action pattern: Hys.Mode/Win.Mode

Screen display: Blue 128×64 OLED

Switch display: 2 red LED

Display units : MPa|kPa|bar|psi|kgf/cm²

Key: 3 silicone rubber keys, please operate according to instructions on the screen.

Temperature display: referenced environment temperature

Peak display: Pressure peak in process

Working Temperature: -20°C ~80°C

Storage Temperature: -40°C ~80°C

Relative Humidity: 0%~85%

EMC: GB/T 17626.2/3/4

Shoc: ≤10g/10Hz...500Hz(IEC 60068-2-6)

Impact: ≤50g/11ms(IEC 60068-2-27)

Protection: IP65

Housing: SS

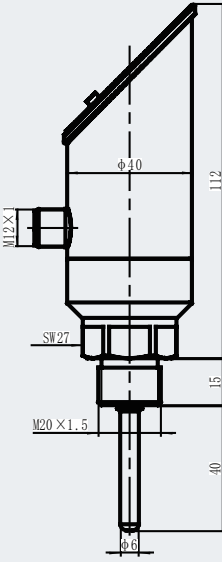







Display board: PMMA

Diaphragm: SS 17-4/316L

Electric connection: M12×1 round plug

Gross weight: 300g

Outline Construction(Unit: mm)

Integrated Construction	Forward up display	Reversal display	Forward up display
			
	Rack Mounting Installation	Pipe horizontal installation	Pipe vertical installation
			
MS801 mounting bracket (optional components):   			

Note: MCU core working temperature is for reference.

Ranges Drift

MPM5581 is able for ranges drift between 25%FS and 100%FS. Analog output changes along with range scale. And also, analog output can be reversal. E.g, 4mA~20mA DC can be changed into 20mA~4mA; . Take 4bar current output as an example:

Range	Range Drift percent	New range	New range scale	
0bar~4bar ①	25%FS ②	1bar ②	0bar~1bar 1bar~2bar ③ 2.1bar~3.1bar 3bar~4bar	
	50%FS	2bar	0bar~2bar 1.5bar~3.5bar 2bar~4bar	
	75%FS	3bar	0bar~3bar 1bar~4bar	
	100%FS	4bar	0bar~4bar	
0bar~4bar ①	25%FS ②	1bar ② reversal output	1bar~2bar ④	

Note: Accuracy will decrease for ranges drift.

Electrical Connection


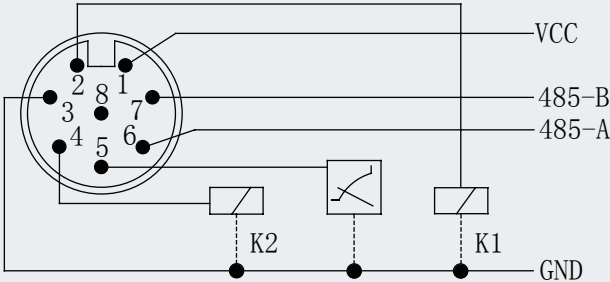
5-pin plug pin definition and wire connection:

Wire	Color	2×PNP+ Current
1	Red	VCC
2	Yellow	K1-Output
3	Black	GND
4	Blue	K2-Output
5	Green	0/4mA~20mA

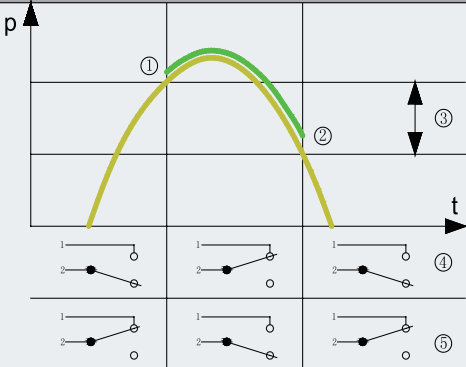
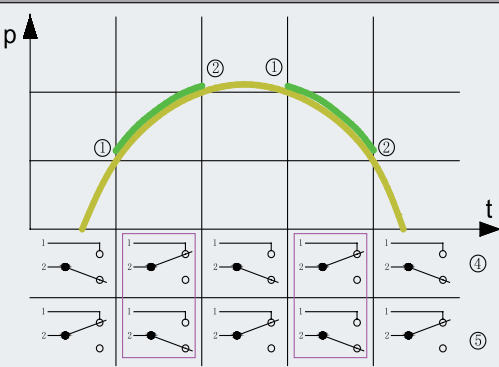
--	--

8-pin plug pin definition and wire connection:

Code	Wire color	2×PNP+Current
1	Red	VCC
2	Yellow	K1-Output
3	Black	GND
4	Blue	K2-Output
5	Green	0/4mA~20mA
6	Brown	485-A
7	White	485-B
8	-	

Switch Action:

Hys. Mode	Win. Mode
	
① Action Value ② Release Value ③ Difference between ① and ② /hysteresis ④ Output status of NO ⑤ Output status of NC	① Upper action value ② Lower action value ④ Output status of NO ⑤ Output status of NC
Setting range for switch points: Action Value: 1.5%FS~100%FS Release Value: 1%~99.5%FS Action Value-Release Value≥0.5%FS	Switch point setting ranges: Upper Action Value: 1.5%FS~100%FS Lower Action Value: 1%~99.5%FS Upper Action Value-Lower Action Value≥0.5%FS
Switch action time delay can be set: 0.0s~99.9s	

Optional Components

MS801 Mounting Bracket

MS901 2m RVVP cable with 5-pin M12X1 female right angle plug

MS902 2m RVVP cable with 8-pin M12X1 female right angle plug

Order Guide

MPM5581		Intelligent Pressure Switch					
		Code	Pressure Range	Type	Code	Pressure Range	Type
		G1	0bar~1bar	G	A1	0bar~1bar	A
		G2	0bar~3.5bar	G	A2	0bar~3.5bar	A
		G3	0bar~7bar	G	A3	0bar~7bar	A
		G4	0bar~16bar	G	A4	0bar~16bar	A
		G5	0bar~35bar	G	A5	0bar~35bar	A
		G6	0bar~70bar	G	A6	0bar~70bar	A
		G7	0bar~100bar	G			
		G8	0bar~200bar	G			
		G9	0bar~400bar	G			
		G10	0bar~600bar	G			
		Code	Output				
		2KA	2×PNP+0/4mA~20mADC				
				Code	Thread		
				C1	M20X1.5 male, face-seal		
				C2	G1/4 male		
				C3	G1/2 male		
				C5	M20X1.5 male, waterline seal		
				C6	1/4NPT male		
				Code	Others		
				R5	5-pin M12X1 male plug		
				R8	8-pin M12X1 male plug for Modbus communication		
MPM5581	G4	2KA	C2	R5	the whole spec.		

Notes

1. MPM5581 standard electric connection is 5-pin M12X1 male plug without Modbus communication.
2. Thread can be customized according to user's request. Please make clear note in purchase order.
3. If users have special request for specifications and functions, please contact our company.

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Пермь (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://microsensor.nt-rt.ru/> || moj@nt-rt.ru