

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://microsensor.nt-rt.ru/> || moj@nt-rt.ru

Датчик температуры МТМ4831. Технические характеристики.



Features

- EXIA / EXD/ CCS / CE certified
- Compact size, easy installation
- Zero and span adjustable
- Local display optional
- Multi-output signals
- Convenient filed configuration

Introduction

MTM4831 temperature transmitter is available for measuring temperature from $-200^{\circ}\text{C} \sim 1200^{\circ}\text{C}$ of various liquid, gas or solid surface directly. It uses special temperature module to make linearity correction on temperature sensing element, outputting a standard analog/digital signal. With various outputs, it is easy to apply for temperature measurement in many different fields including petroleum, metallurgy, chemical industry, power station and light industry, etc.

Specifications

• Sensor Graduation

Code	Name	TEMP. Range	Accuracy Class	Allowable Error/ $^{\circ}\text{C}$	Temperature Range of Different Accuracy
PT100	PT100 Thermal Resistance	$-200^{\circ}\text{C} \sim 500^{\circ}\text{C}$	AA	$\pm (0.1+0.0017 t)$	$0^{\circ}\text{C} \sim 100^{\circ}\text{C}$ (Thin Film) $-50^{\circ}\text{C} \sim 200^{\circ}\text{C}$ (Wire-wound)
			A	$\pm (0.15+0.002 t)$	$-50^{\circ}\text{C} \sim 300^{\circ}\text{C}$
			B	$\pm (0.3+0.005 t)$	$-200^{\circ}\text{C} \sim 500^{\circ}\text{C}$
PT1000	PT1000 Thermocouple	$-50^{\circ}\text{C} \sim 200^{\circ}\text{C}$	A	$\pm (0.15+0.002 t)$	$-50^{\circ}\text{C} \sim 200^{\circ}\text{C}$
			B	$\pm (0.3+0.005 t)$	$-50^{\circ}\text{C} \sim 200^{\circ}\text{C}$
K	K-type Thermocouple (Nickel-chrome - Nickel-silicon)	$-40^{\circ}\text{C} \sim 1200^{\circ}\text{C}$	I	$\pm 1.5^{\circ}\text{C}$	$-40^{\circ}\text{C} \sim 375^{\circ}\text{C}$
				$\pm 0.004 t $	$375^{\circ}\text{C} \sim 1000^{\circ}\text{C}$
			II	$\pm 2.5^{\circ}\text{C}$	$-40^{\circ}\text{C} \sim 333^{\circ}\text{C}$
				$\pm 0.0075 t $	$333^{\circ}\text{C} \sim 1200^{\circ}\text{C}$

- Temperature Ranges: $-200^{\circ}\text{C} \dots 0^{\circ}\text{C} \sim 500^{\circ}\text{C}$ (PT100)
 $-50^{\circ}\text{C} \dots 0^{\circ}\text{C} \sim 200^{\circ}\text{C}$ (PT1000)
 $-40^{\circ}\text{C} \dots 0^{\circ}\text{C} \sim 1200^{\circ}\text{C}$ (K Type)
- Power Supply: $10\text{V} \sim 30\text{V DC}$ (Typical: 24V DC)
 $15\text{V} \sim 30\text{V DC}$ (Display)
- Output: $4\text{mA} \sim 20\text{mA DC}$
 $4\text{mA} \sim 20\text{mA DC} + \text{HART}$
 $4\text{mA} \sim 20\text{mA DC} + \text{RS485}$
RS485
Thermal Resistance, Thermocouple
- Accuracy: $\pm 1.0\% \text{FS}, \pm 0.5^{\circ}\text{C}, \pm 0.25^{\circ}\text{C}$
- Display: 4-digit LCD/LED

- Insulation Resistance: $\geq 20\text{M}\Omega @ 500\text{V DC}$
- Stability: $\pm 0.5\% \text{FS/year}$ (general)
- Ambient Temperature: $-25^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- Relative Humidity: $< 95\%$
- Storage Temperature: $-40^{\circ}\text{C} \sim 120^{\circ}\text{C}$
- Weight: About 1100g (header)
- Explosion proof :

Exia IIC T6 Ga

Transmitter Ex-proof parameter:

Ui: 28V DC Ii: 93mA DC Pi: 0.65W


Ci: $0.022\mu\text{F}$ Li: 0mH

Ex d IIB T6 Gb



Construction Material

- Electronic housing: aluminum alloy
- Media wetted material: 304 stainlesssteel
316 stainless steel/others
- Temperature sensing element: PT100/PT1000
- Display window: flameproof glass


Outline Construction (Unit: mm)

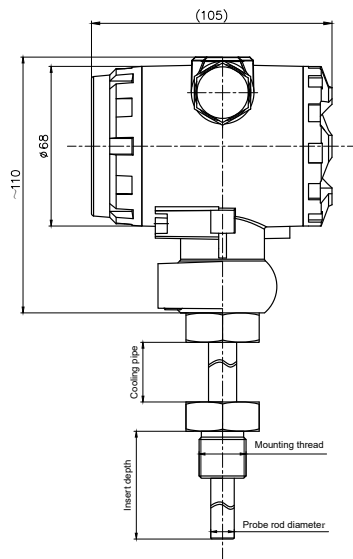



Integrated Type

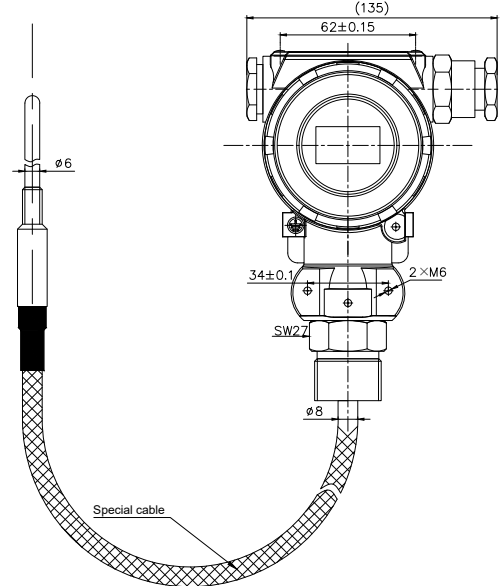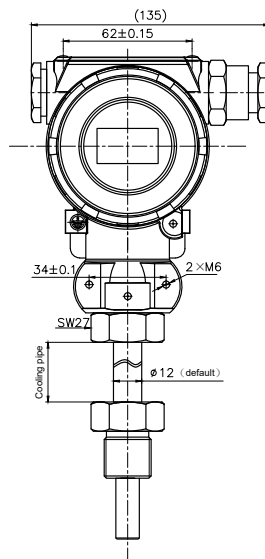


Split Type




Welding base



Welding sleeve



Electrical Connection

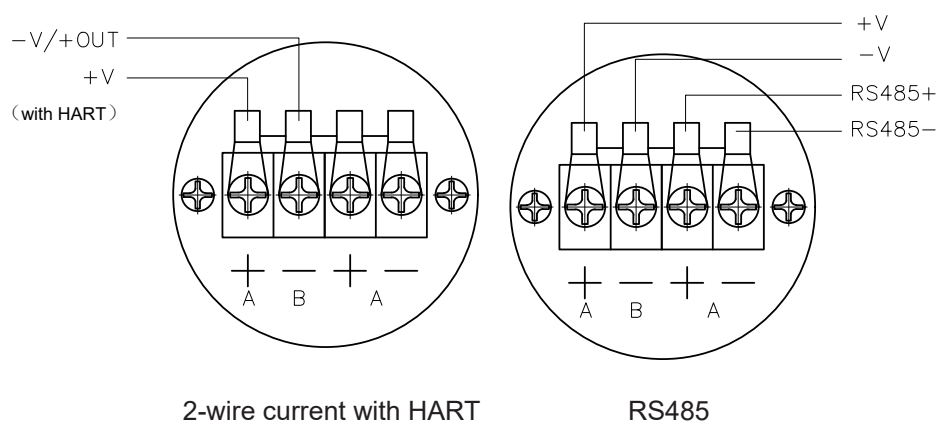

2-wire current with HART

RS485

EMC Effects

SN	Test Item	Test Standard	Test Condition	Performance Level
1	Conducted disturbance measurements	GD22-2015 3.2 CISPR 16-2-1	Frequency range: 10kHz ~ 30MHz	Qualified
2	Radiated disturbance measurements	GD22-2015 3.3 CISPR 16-2-3	Frequency range: 150kHz ~ 6GHz	Qualified
3	Electrostatic discharge immunity test	GD22-2015 3.4 GB/T 17626.2/IEC 61000-4-2	4kV (contact) 8kV (air)	B
4	Radiated, radio-frequency electromagnetic field immunity test	GD22-2015 3.5 GB/T 17626.3/IEC 61000-4-3	80MHz ~ 6GHz 10V/m	A
5	Electrical fast transient/burst immunity test	GD22-2015 3.6 GB/T 17626.4/IEC 61000-4-4	2 kV 2.5 kHz 5/50 ns	B
6	Surge immunity test	GD22-2015 3.7 GB/T 17626.5/IEC 61000-4-5	line ~ line: 0.5 kV line ~ ground: 1 kV	B
7	Low frequency conducted immunity test	GD22-2015 3.8 GB/T 17626.6/IEC 61000-4-6	Power frequency: 15 ~ 100 harmonics Frequency range: 50Hz ~ 10kHz	A
8	Immunity to conducted disturbances, induced by radio-frequency fields	GD22-2015 3.9 GB/T 17626.6/IEC 61000-4-6	150kHz ~ 80MHz	A

Performance Criteria:

Criterion A: The transducer must maintain normal operation during and after the test, with no performance degradation.

Criterion B: Temporary functional loss and performance degradation are permitted during the test, without changing the actual operating mode or stored data. The transducer must return to normal operation with no performance degradation.

Ordering Guide

MTM4831 Temperature Transmitter			
Range	[X ~ Y°C] X,Y is the temperature upper limit and lower limit, unit °C		
	-200°C ... 0°C ~ 500°C (PT100)		
	-50°C ... 0°C ~ 200°C (PT1000)		
	-40°C ... 0°C ~ 1200°C (K Type)		
L	Accuracy: ±1.0%FS (-200°C ... 0°C ~ 1200°C)		
M	Accuracy: ±0.5%FS (-40°C ... 0°C ~ 150°C)		
H	Accuracy: ±0.25%FS (-20°C ... 0°C ~ 105°C)		
Code	Output Signal		
	E 4mA ~ 20mA DC		
	EH 4mA ~ 20mA DC + HART		
	R8 RS485		
	ER8 4mA ~ 20mA DC + RS485		
	Z Thermal resistance		
	R Thermocouple		
Code	Protection pipe diameter Unit: mm		
	6 φ6		
	8 φ8		
	12 φ12		
	16 φ16		
	612 Inner pipe φ6,Outer pipe φ12 (φ12 welding casing)		
	816 Inner pipe φ8,Outer pipe φ16 (φ16 welding casing)		
Code	Installation Method and Process Connection (Split type: Header default)		
	I Fixed thread installation, M20×1.5 male, thread length 18mm		
	II Fixed thread installation, M27×2 male, thread length 32mm		
	III Fixed thread installation, G1/2 male, thread length 20mm		
	IV Fixed flange installation (DN10, DN15, DN20, DN32...)		
	V Chuck installation (Clamp φ25.4, φ50.4...)		
	VI Movable flange installation (DN10, DN15, DN20, DN32...)		
	VII Fixed thread installation, M16×1.5 male, thread length 18mm		
	VIII Fixed thread installation, G3/8 male, thread length 14mm		
	IX Other standard thread sizes, please note		
	X Fixed thread installation, NPT1/4 male, thread length 14mm		
	XI Fixed thread installation, G1/4 male, thread length 14mm		
Insert depth	Protection pipe insert depth (unit mm)		
	XXX According to the actual length required (the product with a base installation is required, the insertion depth is the size except the base)		
Code	Wetted part		
	1 SS304 (default)		
	2 SS316L		
	3 PTFE sleeve		
	4 Other materials, please note		
Code	Display type		
	A LCD display		
	B No display		
	C LED display (no flameproof type)		
Code	Other		
	i EXIA (Exia IIC T6 Ga)		
	d EXD (Exd IIB T6 Gb)		
	T CCS		
	N Null		
Code	Cooling pipe (unit: mm)		
	XXX(Integrated) 0mm [-50°C ~ 100°C]		
	00mm [-200°C ~ 150°C]		
	50mm [-200°C ~ 500°C]		
F	Split Type		

Split type Order Guide

F	Split type, please continue to choose according to the following selection	
	Code	Cable length
	XXX	Specific length of high temperature shielded cable (unit: meter)
	Code	Cable form
	N	Non-armored cable
	KK	Armored tube cable (stainless steel corrugated tube)
	Code	Probe fixing method
	GL	Fixed thread installation,
	KT	Movable thread installation
	FL	Fixed flange installation
	KG	Chuck installation (Clamp $\varnothing 25.4$, $\varnothing 50.4...$)
	TR	Immersion
	BG	Clamp type (The diameter of the protective tube can be customized)
	TP	Surface mount type (The diameter of the protective tube can be customized)
***-	F	-
	5	-
	KK	-
	TR	
Split type specification		

Notes

1. If there is no special requirement, except the probe part and explosion-proof housing, other materials are stainless steel 304.
2. For the content not included in the order guide selection, please consult our company for customization. This item is replaced by '*', and please explain them in the remarks or provide drawings.
3. Clamp type and surface mount type have a large deviation due to different environmental temperature. It is recommended to add heat preservation measures.
4. For example: MTM4831[0°C ~ 200°C]L-E-6-*-300-1-A-d-150
5. Description: MTM4831 temperature transmitter, accuracy $\pm 1.0\%$ FS, range [0 °C ~ 200 °C], 4mA ~ 20mA output, probe outer diameter 6mm, installation method shown in the drawings, protection pipe insertion depth 300mm, protection tube material SS304, LCD display, flameproof, cooling part length 150mm.

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47