

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://microsensor.nt-rt.ru/> || moj@nt-rt.ru

Пьезорезистивный датчик давления МРМ285. Технические характеристики.



Features

- Cost Effective, Small size
- Chip from international famous brand; Laser Trimming for temperature compensation
- Pressure range: 0kPa~100kPa...3.5MPa
- Gauge, sealed gauge and absolute
- Constant current/ constant voltage power supply
- Isolated construction, enable to measure various media
- $\Phi 15\text{mm}$ standard OEM pressure sensor
- Full stainless steel 316L

Application

- Industrial process control
- Level measurement
- Gas, liquid pressure measure
- Pressure checking meter
- Pressure calibrator
- Liquid pressure system and switch
- Cooling equipment and air conditioner
- Aviation and navigation inspection

Introduction

MPM285 is an cost effective piezoresistive pressure sensor with small size. It has same outline, mounting dimensions and sealing methods as our other similar products, so it is highly interchangeable. It is widely used for pressure measurement of media which is compatible with stainless steel and Viton, especially the working site with limit installation space.

Electrical Performance

- Power supply: $\leq 2.0\text{mA DC}$; $\leq 10\text{V DC}$
- Electrical connection: Kovar pin
- Common mode voltage output: 50% of input (typ.)
- Input impedance: $2.5\text{k}\Omega \sim 5\text{k}\Omega$
- Output impedance: $3.5\text{k}\Omega \sim 6\text{k}\Omega$
- Response (10%~90%): $< 1\text{ms}$
- Insulation resistor: $100\text{M}\Omega$, 100VDC
- Overpressure: 1.5 times FS

Construction Performance

- Diaphragm: stainless steel 316L
- Housing: stainless steel 316L
- Pin: Kovar
- O-ring: Viton
- Net weight: $\sim 10\text{g}$

Environment Condition

- Shock: no change at 10gRMS, (20~2000)Hz
- Impact: 100g, 11ms
- Media compatibility: the gas or liquid which is compatible with construction material and Viton


Basic Condition

- Media temperature: (35±1)℃
- Environment temperature: (35±1)℃
- Shock: 0.1g (1m/s²) Max
- Humidity: (50%±10%) RH
- Local air pressure: (86~106)kPa
- Power supply: (1.5±0.0015) mADC

Specification


Item*	Min.	Typ.	Max.	Units
Linearity		±0.2	±0.25	%FS,BFSL
Repeatability		±0.05	±0.075	%FS
Hysteresis		±0.05	±0.075	%FS
Zero output			±2.0	mVDC
FS output	50			mVDC
Zero thermal error		±0.75	±1.0	%FS, @35℃
Span thermal error		±0.75	±1.0	%FS, @35℃
Compensated temp. range	0 ~ 70			℃
Working temp. range	-40 ~ 125			℃
Storage temp. range	-40 ~ 125			℃
Stability error	±0.2			%FS/year
*testing at basic condition **Zero output for closed loop sensor.				

Outline Construction (Unit: mm)

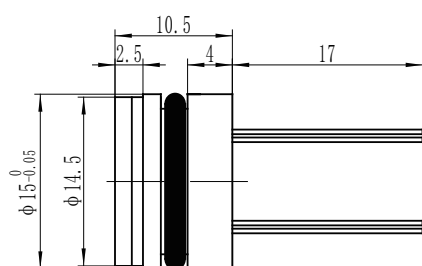

The suggested mounting dimension is $\Phi 15^{+0.05}_{+0.02}$ mm

Electrical Connection



Pin	Definition
4	-OUT
5	-IN
8	+IN
9	+OUT

The actual electrical connection method, please check the parameter label enclosed with products.

Order Guide

MPM285		Pressure Sensor											
		Range code		Pressure range		Ref.	Range code	Pressure range		Ref.			
		03		0kPa~100kPa		G.A	10	0MPa~1MPa		G.A			
		07		0kPa~200kPa		G.A	12	0MPa~2MPa		G.A			
		08		0kPa~350kPa		G.A	13	0MPa~3.5MPa		G.S.A			
		09		0kPa~700kPa		G.A							
				Code		Pressure type							
				G		Gauge							
				A		Absolute							
				S		Sealed gauge							
					Code		Pressure connection						
					0 or null		O-ring						
					Code		Compensation						
					L		Laser trimming						
							Code		Electrical connection				
				1		Kovar pin							
				2*		100mm silicon rubber flexible wires							
MPM285		08		G		0		L		1		the whole spec	

*The default code for electrical connection is "1" on the parameter card. And it is also allowed to print code "1" if the electrical connection is flexible wire (original code "2"). The wire length shall be as per customers' request on the contact.

Notes

1. We suggest you to use Suspended construction when you install the sensor to prevent affecting sensor stability;
2. Please pay attention to protect sensor isolated diaphragm and ceramic compensated board, to avoid damaging sensor or affecting the performance;
3. Temperature resistant range of standard Viton O-ring of sensor is -20°C ~250°C . When working temperature is lower than -20°C , or sensor is applied in critical environment, please contact us.

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47