

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://microsensor.nt-rt.ru/> || moj@nt-rt.ru

Погружной датчик уровня МРМ416W. Технические характеристики.




Features

- Separate construction; full sealed stainless steel construction for submersible/inserted sensor; aluminum-alloy electric connection box; easy for installation, wiring and calibration;
- Explosion-proof version product conforms to Exia II CT6 of Standard GB3836.4; Explosion-proof Certificate is issued
- Ship-use product conforms to CCS Rules of Classification of Sea-going Steel Ships(2006); Ship-use Product Certificate is issued;
- CE Certificate

Introduction

MPM416W Submersible Level Transmitters use high performance piezoresistive pressure sensor as sensing elements. It measures liquid static pressure accurately which is positive proportional to liquid depth, transmitting pressure signal into standard current/voltage output signal by amplifier circuit board. The product has high accuracy, compact size and easy operation characteristics, and it can be submersible into the liquid to measure level from transmitter bottom to liquid surface. It is widely used for the liquid measure and control of both petroleum, chemi-industry, power station, city water supply and drainage and hydrology.

Load Characteristic

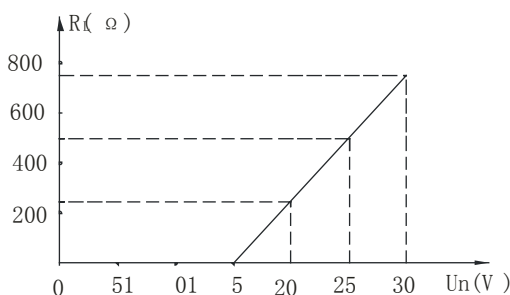

2-wire

4mA~20mAADC output

15V~30VDC power supply


$$R_L \leq \frac{U_n - 15V}{20mA} \times 10^3 (\Omega)$$

Specifications


Pressure range	1, 2, 5, 10, 20, 50, 100, 200mH ₂ O		
Overpressure	1.5times FS		
Accuracy	±0.25%FS(typ.) ±0.5%FS(max.)		
Stability error	±0.1%FS(typ.) ±0.2%FS(max.) pressure range>10mH ₂ O		
	±10mmH ₂ O(typ.) ±20mmH ₂ O(max.) pressure range≤10mH ₂ O		
Temp. drift		Zero drift, ± %FS/°C	
	Range>10mH ₂ O	0.005(typ.)	0.01(max.)
	Range≤10mH ₂ O	0.01(typ.)	0.02(max.)
	Range≤5mH ₂ O	0.015(typ.)	0.03(max.)
	Range≤2mH ₂ O	0.025(typ.)	0.05(max.)
Transmitting	2-wire	3-wire	3-wire
Power supply	15~28VDC(Intrinsic safe version is supplied through safe barrier)		
Output signal	4~20mADC	0~10/20mADC	0/1~5/10VDC
Load(Ω)	<(U-15)/0.02A	<(U-15)/0.02A	>5k
Material contacting with media	Housing: stainless steel 1Cr18Ni9Ti		O-ring: Viton
	Diaphragm: stainless steel 316L		Rubber casing: NBR
	Cable: Φ7.2mm PVC/Polyurethane cable with vented tube		
Operation temp.	-30°C ~80°C -10°C ~70°C -10°C ~60°C		
Storage temp.	-40°C ~120°C -20°C ~85°C		
Protection	IP68(sensor part), IP65(wiring part)		
Ex-proof class	Exia II CT6		

Outline Construction (Unit: mm)

Outline dimension

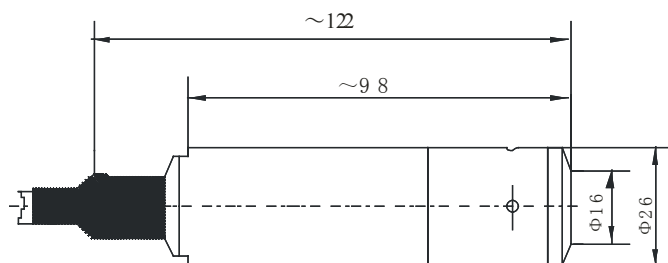


Outline and Installation Dimension of Electric Housing

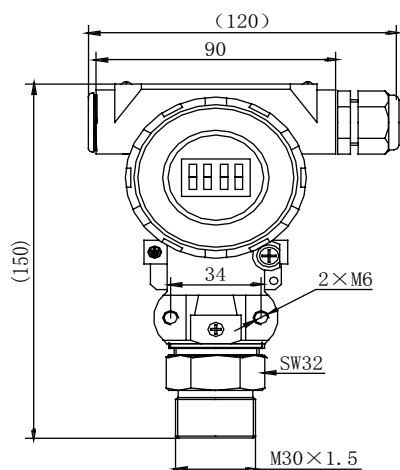


Electrical Connection

Terminal connection in Electrical Housing

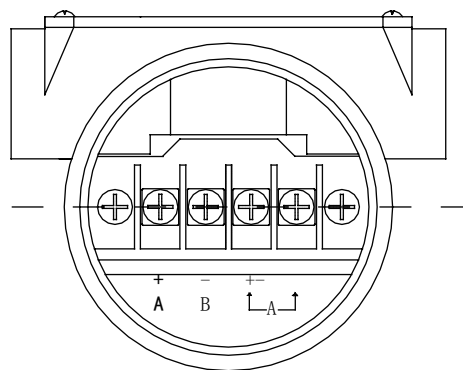


Current		Voltage	
Terminal	Definition	Terminal	Definition
+A	V+	+A	V+
-B	IO	-B	OUT
		A	GND


Application Example

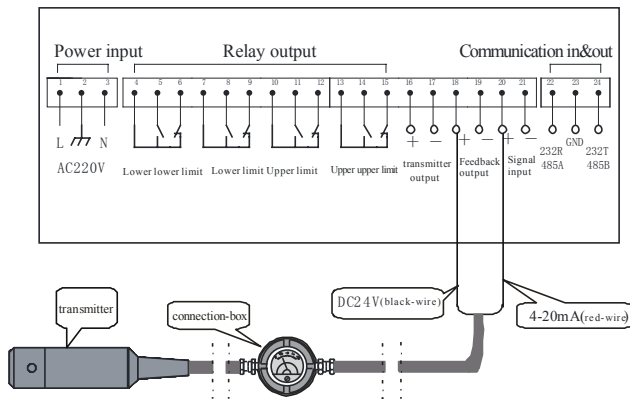


Connecting level transmitter with measure display to build up one measure and control system.

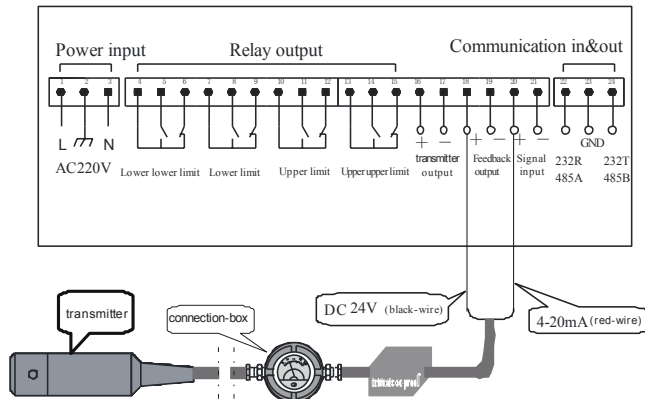


Connecting Ex-proof version transmitter with safe barrier and measure display to build up measure and control system;

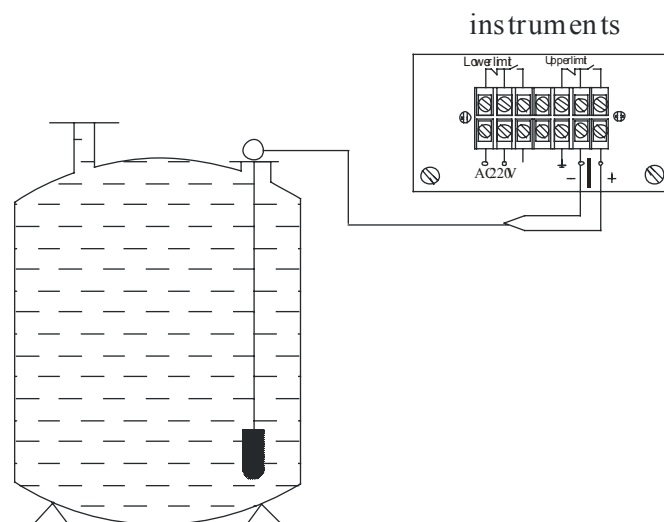

When measure static level in open tank, put level transmitter into tank bottom, and fix transmitter cable and connection box at the open tank entrance.

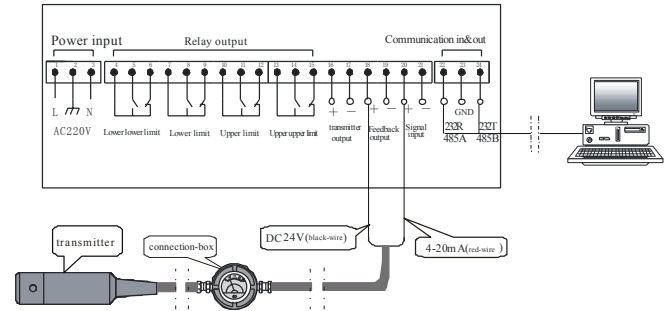


Connecting with MSB9418 measure display to build up one liquid measure and control system with upper and lower limits alarming. Meanwhile, the display could output RS232 or analog signal 1V~5VDC, 0V~5VDC, 4mA~20mADC.

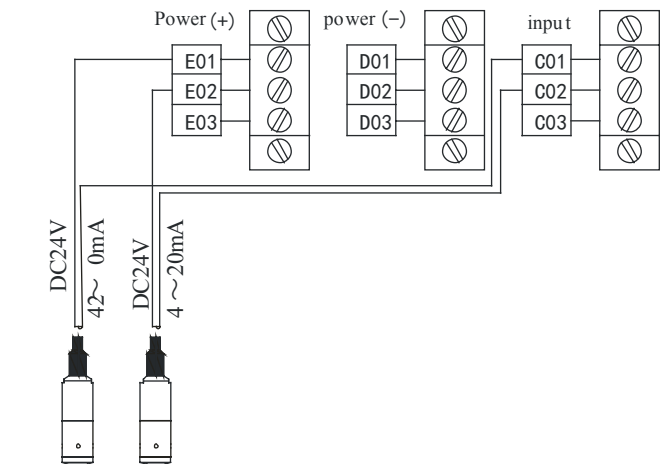



1#transmitter 2#transmitter

Connecting the most two level transmitter with MSB9438 measure display to build up one level difference system with multi-channel display. It can also output 4mA~20mADC analog output and provide upper and lower limit alarming and control.


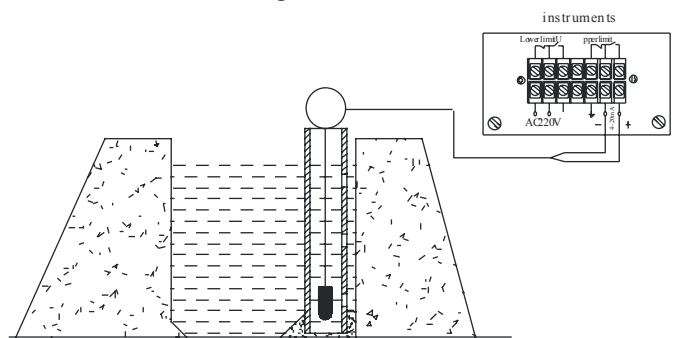


When measuring flow water, insert one steel tube $\Phi 45$ which has little holes $\Phi 5$ at different heights. Make holes opposite to water flowing direction, and let water go into the tube and fix cable and connection box at the


Installation at Local Place (Unit: mm)

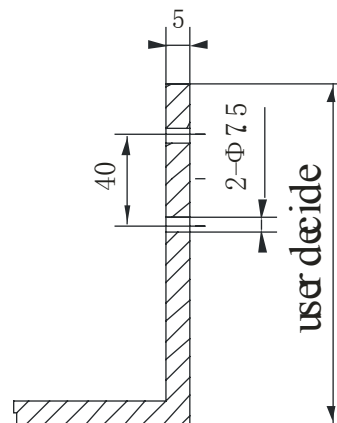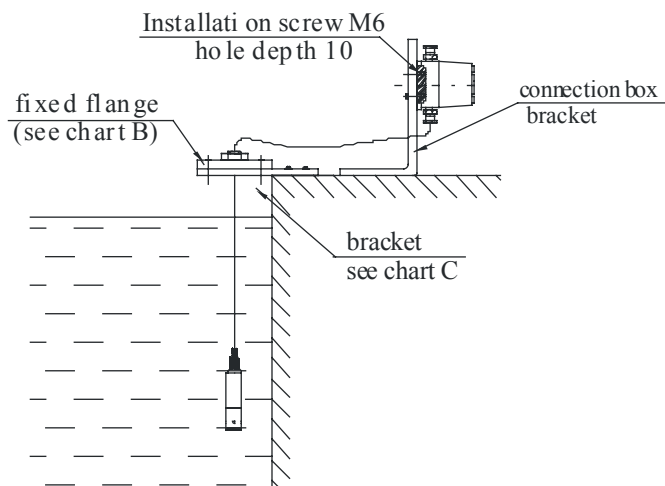

ChartA (user decide)

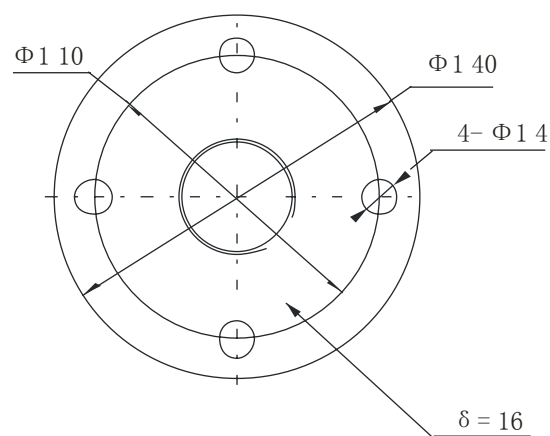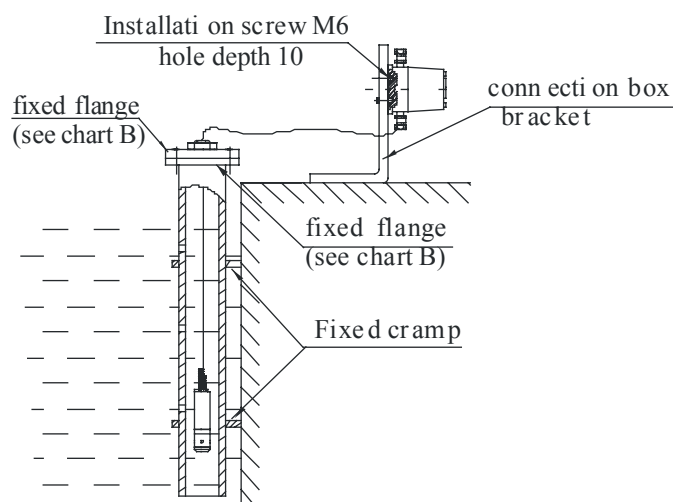

ChartB (Enclosed by factory or user decide)

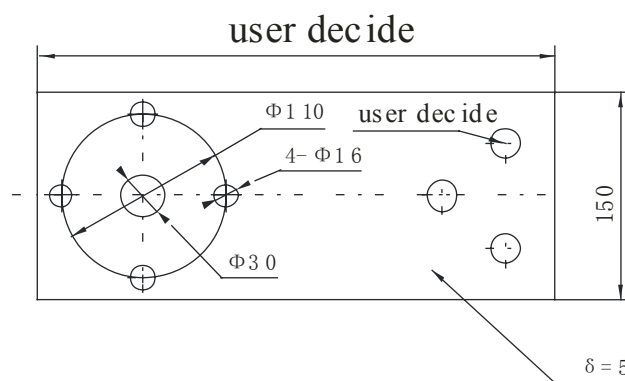

ChartA (user decide)

Order Guide

MPM416W		Submersible Level Transmitter							
		Range(mH ₂ O)	[0~X mH ₂ O]L	L: cable length, suggested: L-X=(1~2)m					
			Code	Output signal					
			E	4~20mADC					
			F	1~5VDC					
			J	0~5VDC					
			Q	0~10mADC					
			U	0~20mADC					
			V	0~10VDC					
			Code	Construction material					
				Diaphragm		Pressure port	Housing		
				22	SS 316L	SS	SS		
				25	Tantalum	SS	SS		
				Code	Others				
					M ₁	0~100% hand pointer indicator			
					i	Intrinsic safe version Exia II CT6			
					C ₁	M20×1.5 male, face type seal			
					C ₃	G1/2 male			
					C ₅	M20×1.5 male, waterline seal			
					T	Ship-use			
					F ₁	Fixed flange			
MPM416W	[0~3mH ₂ O]5	E	22	iC ₁	the whole spec				

Notes

1. Please pay attention if the media is compatible with contacting material, especially pay attention to media density at measuring situation (except water);
2. We provide the user with PVC or polyurethane cable; polyurethane cable is more flexible and wearable. If the user has no special requirements, the default would be PVC cable;
3. If the product is installed in lightning and thunder area, please note "lightning Protection" in the order; we suggest to use lightning protection device to make sure power is grounding safely;
4. If the user has special requirement, please feel free to contact with our company.

Алматы (7273)495-231
 Ангартск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47