

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://microsensor.nt-rt.ru/> || moj@nt-rt.ru

Датчик давления МРМ489В. Технические характеристики.

Introduction

MPM489B pressure transmitter is designed especially for pressure measure and control of petroleum, chemi-industry, water conservancy and electricity,etc. The product has good performance and stability, good resistance of EMI, and protection for instantaneous high pressure and surge interfere which is produced by thunder, noise and sharp pulse,etc. The product could work reliably and stably in rough environment for a long time.




Features

- Reliable performance, easy installation and using
- Multi-protection, good resistance of EMI
- Over-current protection, good compatibility
- Short circuit and reverse signal polarity protection
- Zero, span adjustable
- Measure gauge, absolute and sealed gauge

Pressure range	-0.1MPa...0MPa~0.02MPa~100MPa
Media	the liquid or gas which is compatible with stainless steel 1Cr18Ni9Ti
Power supply	12~28VDC
Output signal	4~20mA DC, 2-wire
Load	$R \leq (U-12)/0.02\Omega$
Accuracy	0.5~FS
Thermal error	0.03%FS/°C ($\leq 100\text{kPa}$), 0.02%FS/°C ($> 100\text{kPa}$)
Overpressure	1.5 times FS or 110MPa (min. value is valid)
Environment temp.	-30°C ~+80°C , -10°C ~+60°C (intrinsic safe version)
Media temp.	-40°C ~+80°C
Storage temp.	-40°C ~+85°C
Shock	3-dimensional 10g /frequency 50Hz/ swing1mm, zero and span change<0.3%FS
Impact	100g/20ms, zero and span change<0.3%FS
Humidity	0~90%RH
Protection	IP65
Frequency response	>1kHz
Endurance	10 ⁶ pressure cycles


Construction and Outline Dimension(Unit:mm)

- Housing: Aluminum-casting
- Sensor housing: stainless steel 1Cr18Ni9Ti
- Diaphragm: stainless steel 316L
- O-ring: Viton

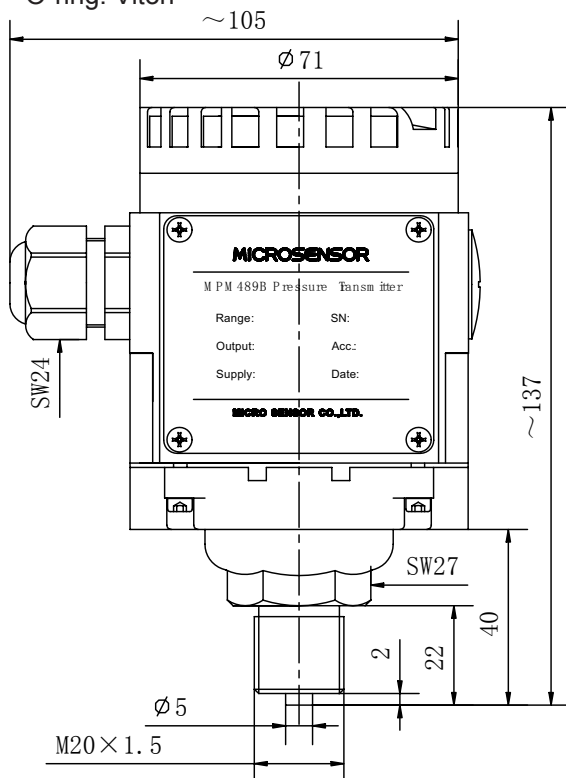

MPM489B Electrical Connection

Connection socket	2-wire
Power(+)	+V
Output	OV/ +OUT
8	+IN

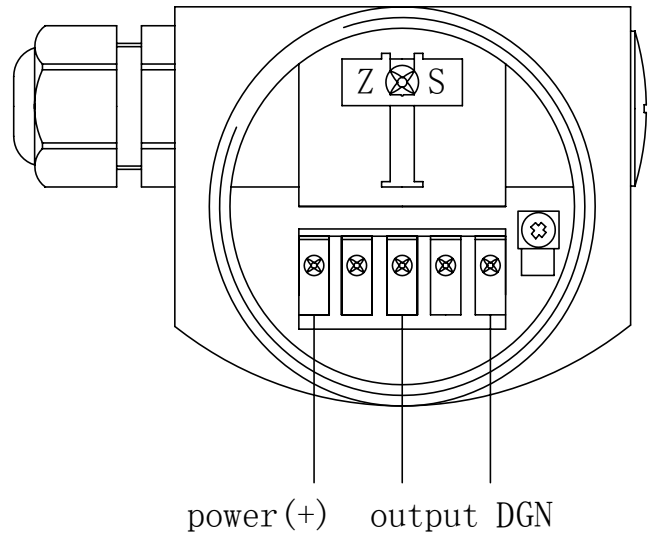

Terminal "GND" should connect with shield wire of the cable, and the shield wire should be grounding reliably; or connect "GND" with housing terminal.

Order Guide

MPM489B		Pressure Transmitter						
		Range		Pressure range: -0.1MPa...0MPa~0.01MPa...100MPa				
		[0~X]kPa or MPa		X: Actual measurement range				
				Code	Output			
				E	4mA~20mADC			
				Code	Construction material			
					Diaphragm	Pressure port	Housing	
				33	SS 316L	SS	SS	
				25	Tantalum	SS	SS	
							Code	Others
		C1	M20×1.5 male, face type seal					
		C3	G1/2 male(used for flush diaphragm type)					
		C5	M20×1.5 male,waterline seal					
		G	Gauge					
		S	Sealed gauge					
		A	Absolute					
MPM489B	[0~1000] kPa	E	22	C1G	the whole spec			

Notes

- Please pay attention the media should be compatible with product parts which contact with the media;
- The pressure port is optional due to the users' demands, please inform that in the order;
- If the users have any special requirement, please feel free to let us know.

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Пермь (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://microsensor.nt-rt.ru/> || moj@nt-rt.ru