

Алматы (7273)495-231
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Пермь (812)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47

<https://microsensor.nt-rt.ru/> || moj@nt-rt.ru

Погружной датчик уровня MPM489WZ3. Технические характеристики.

Introduction

MPM489WZ3 uses high performance pressure sensor as sensing element, It could measure liquid static pressure that is positive proportional to level depth precisely, and transform pressure signal into standard current/voltage signal output by amplifier circuit to measure accurate level depth. The product has high accuracy, compact size, easy installation, can be submersible into the liquid directly to measure level and media temperature from transmitter bottom to the liquid surface. It can be widely used for water and other liquid level measurement and control in fields of petroleum, chemi-industry, power station, city water supply and drainage and hydrology etc.

Specification



Features


- Full sealed stainless steel construction for submersible part; sensor and amplifier circuit are all in the sealed stainless steel housing; IP68 Protection;
- Water-proof connection box is recommended; install it in a place easy for electric connection; IP65 Protection;
- Removable top Nylon cap; prevent diaphragm from damage and easy for cleaning;
- Compact size: $\Phi 22$ diameter.

Pressure Range	1m, 2m, 5m, 7m H ₂ O	
Overpressure	1.5 times FS	
Accuracy	$\pm 1\%$ FS	
Stability error	$\pm 0.5\%$ FS/ year	
Transmitting	2-wire	3-wire
Power Supply	11V~28V DC	11V~28V DC
Output Signal	4mA~20mA DC	0.5V~4.5V DC
Load (Ω)	$< (U-11)/0.02$	$> 100k$
Material contacting with media	Housing: stainless steel 304	Seal parts: Viton
	Diaphragm: SS 316L	Cable: $\Phi 7.5$ mm PUR cable with vent tube
	Cap: Nylon	Rubber casing: Chloroprene Rubber
Operation temp.	$-20^{\circ}\text{C} \sim 60^{\circ}\text{C}$	
Compensated Temp.	$0^{\circ}\text{C} \sim 50^{\circ}\text{C}$	
Storage Temp.	$-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$	
Protection	IP68 (sensor part) IP65 (connection box)	

Electrical Connection

Wire Color	2-wire	3-wire
Black	+V	+V
Red	+OUT	+OUT
White	Null	GND
Blue(Only with temperature signal)	Null	TEMP(+)
Brown(Only with temperature signal)	Null	TEMP(+)
Green(Only with temperature signal)	Null	DRAIN

Outline Construction (Unit: mm)

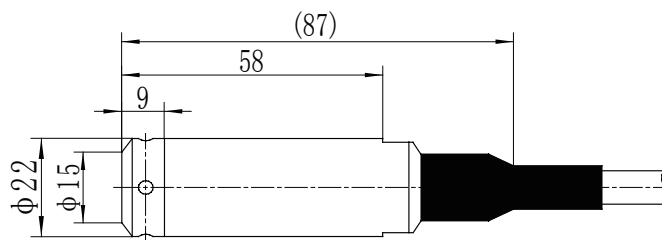

Order Guide

MPM489WZ3		Submersible Level Transmitter						
		Range	1m, 2m, 5m, 7m H ₂ O					
		[0~XmH ₂ O]L	X: actual measured range L: cable length; suggested L-X=(1~2)m					
		Code	Output Signal					
		E	4mA~20mA DC					
		K	0.5V~4.5V DC					
		Code	Construction Material					
			Diaphragm	Pressure port		Housing		
			22	SS 316L		SS		
			24	SS 316L		SS 316L		
		Code	Others					
			M ₁	0%~100% hand pointer indicator(Current output only)				
			Y _b	Aluminum connection box without display				
			Y _c	MS200 water-proof connection box				
			Y _d	PD140 lightening-proof protection device				
			Y _e	connection box(with display or without display)				
F ₁	Fixed flange							
T	With temperature sensor(Voltage output signal only)							
MPM489WZ3	[0~3mH ₂ O]5	E	22	Y _C	the whole spec			

Алматы (7273)495-231
 Ангартс (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-54
 Самара (846)206-03-16
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Саранск (8342)22-96-24
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-90-97
 Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(7172)727-132

Киргизия +996(312)96-26-47